









Warning System Devices

P2475RL Sounder Strobe

System Sensor SpectrAlert P2475RL Sounder/Strobe provides a red lens strobe and warning sounder in a single housing. The low current draw of SpectrAlert products helps minimize power supply requirements. By consuming less current, the flexibility to connect more devices per circuit is possible, for a lower installed cost.

Features

-  Wall Mount
-  Supplied with red lens
-  75 Candela strobe intensity
-  Low current draw
-  Field selectable ISO8201 (T3) or electromechanical tone
-  Field selectable High or Low volume selection
-  Sounder and Strobe can be operated independently (2 or 4 wire)
-  Universal mounting plate included



P2475RLP Sounder / Strobe

• Melbourne

Unit B2
2A Westall Rd
Springvale
VIC 3171
Tel (03) 9562 7577
Fax (03) 9562 8044
sales.vic@pertronic.com.au

• Sydney

Unit 19
287 Victoria Rd
Rydalmere
NSW 2116
Tel (02) 9638 7655
Fax (02) 9638 7688
sales.nsw@pertronic.com.au

• Brisbane








Unit 3
23 Anthony St
West End
QLD 4101
Tel (07) 3255 2222
Fax (07) 3255 1122
sales.qld@pertronic.com.au

• Adelaide


65 Manton St
Hindmarsh
SA 5007
Tel (08) 8340 9533
Fax (08) 8340 9544
sales.sa@pertronic.com.au

www.pertronic.com.au


Specifications:

-  Operating Voltage: 24VDC
-  Operating Voltage Range: 21VDC to 30VDC
-  Operating Temperature: 0°C to 49°
-  Strobe Flash Rate: 1 flash per second
-  Strobe Flash Type: Xenon tube
-  Input terminal wire gauge: 0.8 to 3mm²
-  Size: (with universal mounting plate) 143 mm (l) x 127 mm (w) x 59 mm (d)

Wiring Connections:

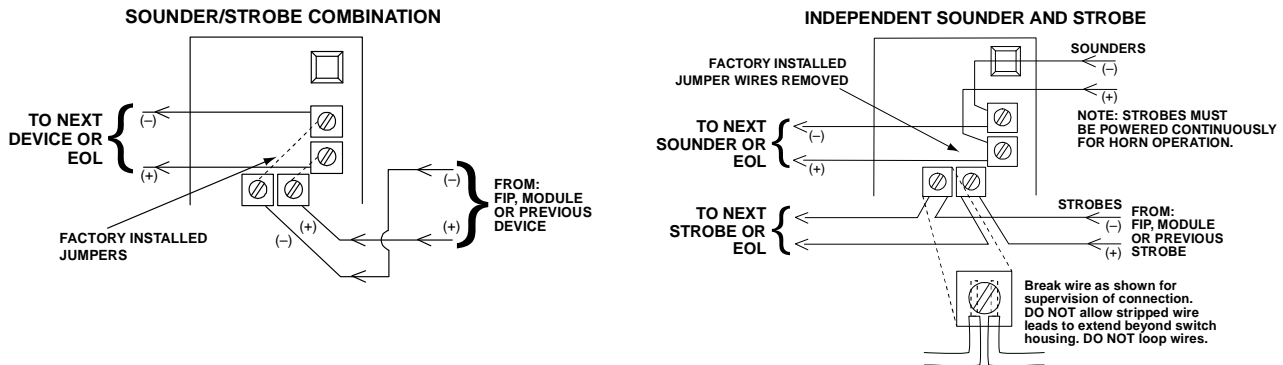

Temporal 3 Tone Pattern:

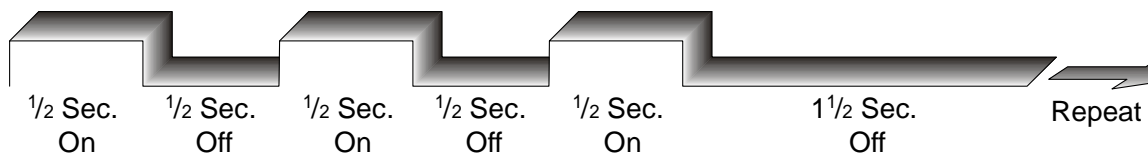

Sounder Output (dBA)		
Electromechanical Tone		24V
Volume	Tone	dBA
High	Temporal 3	82
	Non-temporal	88
Low	Temporal 3	75
	Non-temporal	82
3000 Hz Tone		24V
Volume	Tone	dBA
High	Temporal 3	85
	Non-temporal	88
Low	Temporal 3	79
	Non-temporal	82

Current Draw mA		
Volts	Candela	Ave. mA @ 24VDC
24	75	156 - 165

Ordering Information:

Description

SpectrAlert Sounder/Strobe 24V 2/4 Wire Red Lens
SpectrAlert Sounder/Strobe 12/24V 2 Wire Clear Lens

Part Number

P2475RL
P2R

PERTRONIC INDUSTRIES PTY LTD

Melbourne

Unit B2
2A Westall Rd
Springvale VIC 3171
Telephone: (03) 9562 7577
Fax: (03) 9562 8044
sales.vic@pertronic.com.au

Sydney

Unit 19
287 Victoria Rd
Rydalmere NSW 2116
Telephone: (02) 9638 7655
Fax: (02) 9638 7688
sales.nsw@pertronic.com.au

Brisbane

Unit 3
23 Anthony Street
West End Qld 4101
Telephone: (07) 3255 2222
Fax: (07) 3255 1122
sales.qld@pertronic.com.au

Adelaide

Unit 3
65 Manton Street
Hindmarsh 5007
Telephone: (08) 8340 9533
Fax: (08) 8340 9544
sales.sa@pertronic.com.au