

Warning System Devices

C2053 10W EWIS IP66 Plastic Horn Speaker

• Melbourne

Unit B2
2A Westall Rd
Springvale
VIC 3171
Tel (03) 9562 7577
Fax (03) 9562 8044
sales.vic@pertronic.com.au

• Sydney

Unit 19
287 Victoria Rd
Rydalmere
NSW 2116
Tel (02) 9638 7655
Fax (02) 9638 7688
sales.nsw@pertronic.com.au

• Brisbane

Unit 3
23 Anthony St
West End
QLD 4101
Tel (07) 3255 2222
Fax (07) 3255 1122
sales.qld@pertronic.com.au

• Adelaide

65 Manton St
Hindmarsh
SA 5007
Tel (08) 8340 9533
Fax (08) 8340 9544
sales.sa@pertronic.com.au

www.pertronic.com.au

The popular C2053 Redback horn speaker has been developed to offer high performance at a substantially reduced price.

Although this speaker is suitable for general paging applications, it has been primarily designed with emergency evacuation systems in mind. It is supplied with an in-built bipolar capacitor making it compatible with EWIS control systems utilising line monitoring circuitry. It is also fitted with a 4 core termination lead to provide connection points for loop in, loop out wiring, as required by Australian Standards.

Compact yet very efficient with a high SPL of 104dB, 1W @ 1m. This horn speaker is ideal for car parks, plant rooms, industrial plants, schools, train/bus stations and airports etc. It offers a high degree of speech articulation and program clarity which is essential to meet today's demanding evacuation standards.

A screwdriver adjustable switch is provided to select the desired power tapping.

The speaker is supplied with nickel plated chrome hardware.

Features:


- Tough UV stabilised ABS plastic
- Emergency evacuation system ready
- High SPL performance
- Excellent speech intelligibility
- Outstanding reproduction quality
- Multi-tap transformer
- IP-66 rated
- Neutral two-tone grey colour
- 100V rms rating
- 5 power settings (1.25W to 10W)



C2053 10W Horn Speaker

Specifications:

🔊 Power tapping options:	1.25, 2.5, 5, 7.5 and 10W
🔊 SPL 1W @ 1m:	104dB
🔊 SPL Max Tap @ 1m:	114dB
🔊 Frequency response:	480Hz – 10kHz
🔊 Dispersion angle:	110°
🔊 Dimensions:	180mm (diameter) x 255 (length)

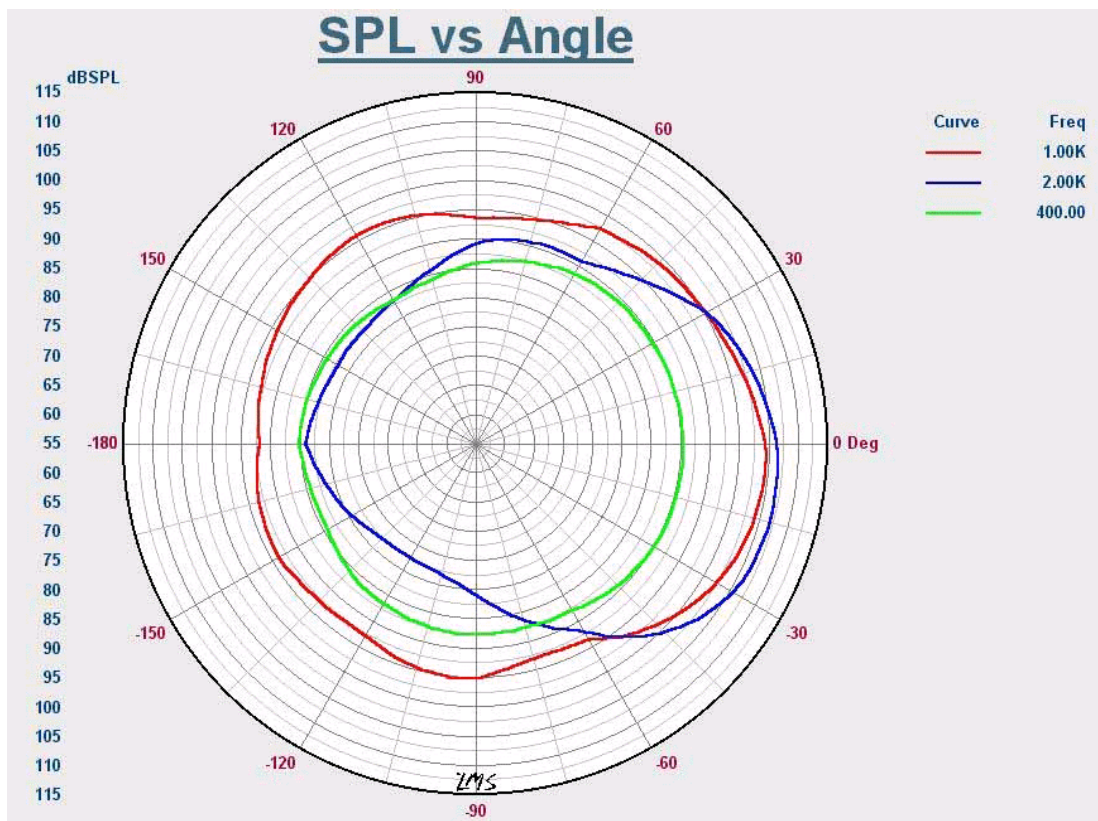

Ordering Information:

Description

10W EWIS IP66 Plastic Horn Speaker

Part Number

C2053

PERTRONIC INDUSTRIES PTY LTD

Melbourne

Unit B2
2A Westall Rd
Springvale VIC 3171
Telephone: (03) 9562 7577
Fax: (03) 9562 8044
sales.vic@pertronic.com.au

Sydney

Unit 19
287 Victoria Rd
Rydalmere NSW 2116
Telephone: (02) 9638 7655
Fax: (02) 9638 7688
sales.nsw@pertronic.com.au

Brisbane

Unit 3
23 Anthony Street
West End Qld 4101
Telephone: (07) 3255 2222
Fax: (07) 3255 1122
sales.qld@pertronic.com.au

Adelaide

Unit 3
65 Manton Street
Hindmarsh 5007
Telephone: (08) 8340 9533
Fax: (08) 8340 9544
sales.sa@pertronic.com.au